

Foam-Control® EPS Crawl Space

Stable R-value and superior moisture resistance to protect your insulation integrity.

Foam-Control EPS with is a cost-effective, durable, and energy efficient solution for interior crawl space wall applications. It is an ideal material to stop energy loss through the wall. Foam-Control EPS is available in a range of thicknesses to meet your local energy code requirements.

Advantages.

- Saves energy
- Meets code requirements for crawl space use
- No ignition barrier required (see ICC-ES ESR-1006)
- No long-term R-value loss or thermal drift
- No CFC, HCFC, HFC, or formaldehyde
- Superior moisture resistance
- Retains R-value even with moisture exposure

Benefits.

Cost effective thermal design is among the highest priorities in construction. Foam-Control EPS crawl space insulation is available in a range of Types necessary to provide energy efficiency, structural integrity, and cost effectiveness. Foam-Control EPS is proven to lower energy costs, saving both money and precious resources.

R-value¹

ASTM C578	1"	1 1/2"	2"	2 1/2"	3"	4"
Type I	4.2	6.3	8.4	10.5	12.6	16.8
Type VIII	4.4	6.6	8.8	11.0	13.2	17.6
Type II	4.6	6.9	9.2	11.5	13.8	18.4
Type IX	4.8	7.2	9.6	12.0	14.4	19.2


¹ Design R-value at 40°F mean temperature

Installation is Easy.

Foam-Control EPS crawl space insulation can be installed to poured concrete walls using standard concrete screws with insulation plates or concrete nails with insulation plates. Installation to crawl space walls can also be achieved using EPS safe low VOC adhesives.


Foam-Control EPS crawl space insulation can be installed to block concrete walls using standard concrete screws with insulation plates or EPS safe low VOC adhesives.

Always follow the fastener or adhesive manufacturers recommendations for attaching EPS insulation to concrete crawl space walls.

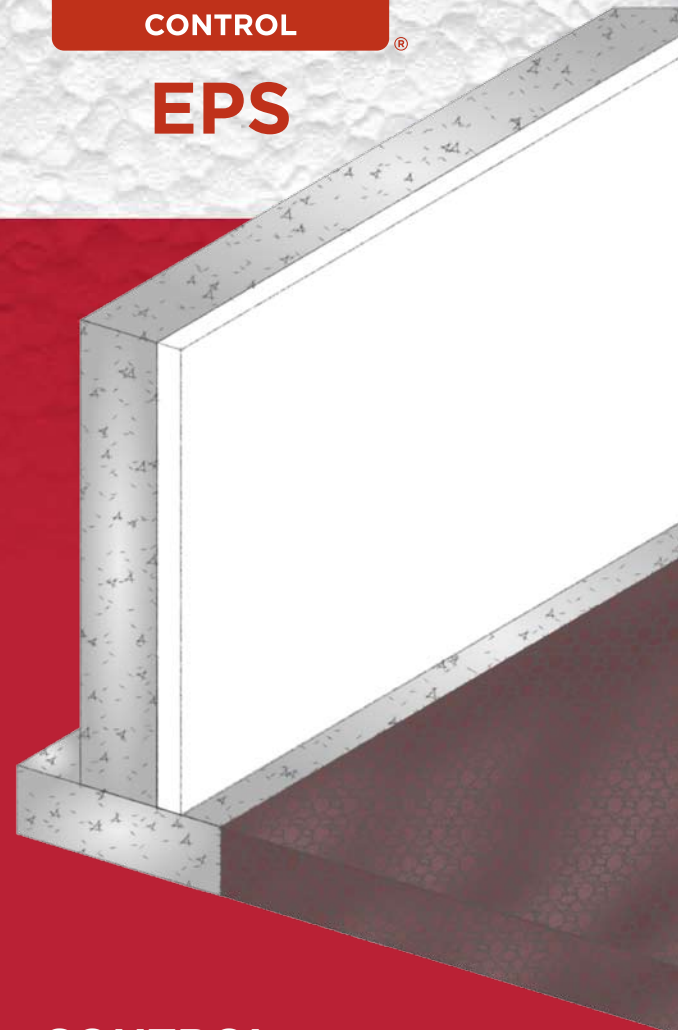

CONTROL, NOT COMPROMISE.®

Foam face-off: Choosing Foam-Control EPS over XPS and Polyiso.

- EPS can easily vary density, thickness, and size
- EPS is less expensive than XPS and ISO
- No CFC, HCFC, HFC, or formaldehyde in Foam-Control EPS
- No long-term R-value loss or thermal drift
- Foam-Control EPS with  is available to provide protection against termites and meets ICC-ES AC239 requirements for termite resistance foam plastic

* Perform Guard is not a barrier, but should be used in conjunction with a total Pest Management Program available from a reputable Pest Control Operator.

Proven to meet, or exceed, building codes.

Foam-Control EPS is manufactured to Quality Control Program standards monitored by Underwriters Laboratories Inc. and recognized by national building codes. Foam-Control EPS meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".



Stands up to the elements.

When tested in accordance with ASTM C1512, "Standard Test Method for Characterizing the Effect of Exposure to Environmental Cycling on Thermal Performance of Insulation Products" EPS maintains its R-value and strength after severe exposure to freeze-thaw cycles.

Foam-Control EPS can stand up to all industry tests—and has. No other EPS can say that.

Foam-Control EPS means control, not compromise.

Foam-Control EPS Insulations are engineered to give you the greatest possible control for your concrete application: from design and timelines, to materials and costs, and—ultimately—control over your results.

Foam-Control EPS with Perform Guard.

One of the most destructive forces anywhere is termites. Foam-Control EPS products can be manufactured with Perform Guard, a proven and safe additive, that effectively resists termites.



- Meets code requirements for ground contact use
- Resistant to termite damage
- Incorporates EPA registered additive
- Safe for handling and noncorrosive

Ready to take control? Start here.

If you're starting to wonder how Foam-Control EPS can contribute to your next project, here's how to find out: Just contact your nearest Foam-Control EPS supplier. They'll be happy to give you a design consultation, information about Foam-Control EPS products, pricing, and the answers to all your questions.



Foam-Control EPS products are manufactured by AFM Corporation licensees.

Copyright © 2010 AFM Corporation. All rights reserved. Printed in USA. Foam-Control, Perform Guard, and Control Not Compromise are trademarks of AFM Corporation, Lakeville, MN.

ICC ES logo is a registered trademark of ICC Evaluation Service, Inc.

UL logo is a registered trademark of Underwriters Laboratories Inc.

USGBC logo is a registered trademark of U.S. Green Building Council.

FC19-12/10-E



**CONTROL,
NOT COMPROMISE.®**